


TC16M 018

Bi-telecentric lens for 35 mm detectors, magnification 2.000 x, F-mount

Magnification	(x)	2.000
Image circle	(mm)	43.3
Object field of view		
with 2k x 10 µm detector	(mm)	10.2
with 4k x 7 µm detector	(mm)	14.3
with 8k x 5 µm detector	(mm)	20.5
with 36 x 24 mm detector	(mm x mm)	18.0 x 12.0
Optical specifications		
Working distance (1)	(mm)	57.8
f/# (2)		16
Telecentricity typical (max) (3)	(deg)	< 0.03 (0.05)
Distortion typical (max) (4)	(%)	< 0.03 (0.05)
Field depth (5)	(mm)	0.3
CTF@ 70 lp/mm	(%)	> 40
Mechanical specifications		
Mount (6)		F
Length (7)	(mm)	259.6
Diameter	(mm)	45
Mass	(g)	900

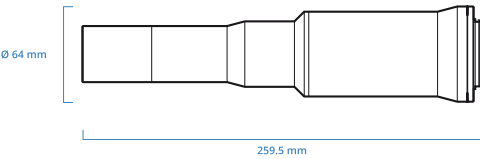

NOTES

- Working distance: distance between the front lens and the object. Set this distance within +/- 3% of the nominal value for maximum resolution and minimum distortion.
- Working F-number: the real F-number of a lens when used as a macro. Lenses with smaller apertures can be supplied on request.
- Maximum slope of chief rays inside the lens: when converted to milliradians, it gives the maximum measurement error for any millimeter of object displacement. Typical (average production) values and maximum (guaranteed) values are listed.
- Percent deviation of the real image compared to an ideal, undistorted image: typical (average production) values and maximum (guaranteed) values are listed.
- At the borders of the field depth the image can be still used for measurement but, to get a very sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 4.8 µm.
- FD stands for Flange Distance (in mm), defined as the distance from the mounting flange (the "metal ring" in rear part of the lens) to the camera detector plane.
- Measured from the front end of the mechanics to the camera flange.

COMPATIBLE PRODUCTS



LTCLHP024-G
Telecentric HP illuminator, beam diameter 30 mm, green



CMHO TC16M 018
Clamping mechanics for TC16M018