





# Mako G

# G-419B NIR

- Ultra-compact (60.5 × 29 × 29 mm)
- Affordable
- PoE
- CMOSIS CMV4000 NIR enhanced sensor

#### Description

#### GigE camera with CMOSIS CMV4000 sensor, NIR optimized, global shutter

Mako G-419B NIR is an industrial GigE camera with the CMOSIS CMV4000 CMOS NIR enhanced sensor. Mako G cameras have the same compact form factor and the same mounting positions as many analog cameras. All models include PoE, three opto-isolated outputs, and a 64 MB FIFO image buffer. The image quality profits from the precisely aligned sensors.#

Options:

- Various IR cut/pass filters, protection glass, various lens mounts
- White medical housing


See the #Modular Concept #for lens mount, optical filter, and case design options.

### Specifications

| Mako G                            | G-419B NIR                                |
|-----------------------------------|---|
| Interface                         | IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE) |
| Resolution                        | 2048 (H) × 2048 (V)                       |
| Sensor                            | CMOSIS CMV4000                            |
| Sensor type                       | CMOS Progressive                          |
| Cell size                         | 5.5 μm x 5.5 μm                           |
| Lens mount                        | C-Mount                                   |
| Max frame rate at full resolution | 26.3 fps                                  |
| ADC                               | 12 bit                                    |
| Image buffer (RAM)                | 64 Mbyte                                  |
| Output                            |   |
| Bit depth                         | 8/12 bit                                  |



| Mako G                                 | G-419B NIR                            |  |
|--|---------------------------------------|--|
| Mono modes                             | Mono8, Mono12, Mono12Packed           |  |
| General purpose inputs/outputs (GPIOs) |                                       |  |
| Opto-isolated I/Os                     | 1 input, 3 outputs                    |  |
| Operating conditions/dimensions        |                                       |  |
| Operating temperature                  | +5 °C to +45 °C housing temperature   |  |
| Power requirements (DC)                | 12 to 24 VDC; PoE                     |  |
| Power consumption (@12 V)              | 2.3 W @ 12 VDC; 2.7 W PoE             |  |
| Mass                                   | 80 g                                  |  |
| Body dimensions (L × W × H in mm)      | 60.5 × 29 × 29 (including connectors) |  |
| Regulations                            | CE, RoHS, REACH, WEEE, FCC, ICES      |  |

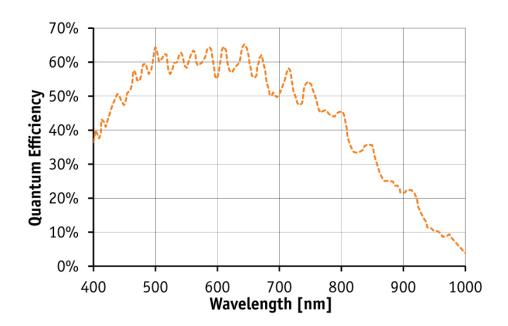

#### Features


Mako G-419B NIR features include:


- Camera temperature monitoring
- Column defect masking
- Region of interest (ROI), separate ROI for auto features
- Auto gain (manual gain control: 0 to 26 dB)
- Auto exposure (manual exposure control: 41 μs to 153 s)
- Look-up tables (LUTs)
- Gamma
- StreamBytesPerSecond (easy bandwidth control)





- Stream hold
- Sync out modes: Trigger ready, input, exposing, readout, imaging, strobe, GPO
- Event channel
- Chunk data
- Storable user sets


### Technical drawing

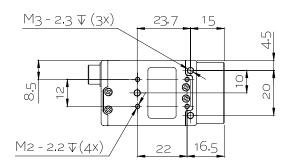











## **Applications**

Mako G-419B NIR is an inexpensive industrial GigE camera with a compact form factor. It is suitable for all typical machine vision applications:

- Robotics
- Quality control
- Inspection, surveillance
- Industrial imaging
- Machine vision
- Logistics