




Product Highlights

- Cost-effective, feature-rich design
- Robust, sealed IP67 enclosure available soon
- On-board smart driver - seamless strobe or continuous
- Adaptive OverDrive - optimized power under all strobe conditions
- Thermal Foldback - optimal heat damage protection
- Daisy-chain up to 4 units with pass-through control




General Specifications

Electrical Specifications <small>Driver internal to light source inputs are tolerant to 30VDC</small>	Color	Current	
	470, WHI	650 mA Max	
	625	400 mA Max	
Input Voltage Range	24V nom. (min 22/max 28)		
Maximum Input Current	0.42-0.49A		
Strobe/On-Off Control	up to 5X overdrive, active high		
Analog Intensity Control	Analog 0.7-10V; 0.7V=10% 10V=100%		
Trigger-to-Pulse Latency	10µsec		
Normal Operating Temperature	0 - 60°C		
Weight (g)	241g		
Standard Cable Information			
Photobiological Risk Factor IEC 62471	Group 1 (Low-Risk): No photobiological hazard under normal behavioral limitations for 470, 625, and WHI.		
Compliance	  		
IP Rating	IP67		
Maximum Case Temperature	55°C		
Lumen Maintenance	L70 = 50,000 hours		

EuroBrite™ Bar

AL-S025300

Mechanical Specifications

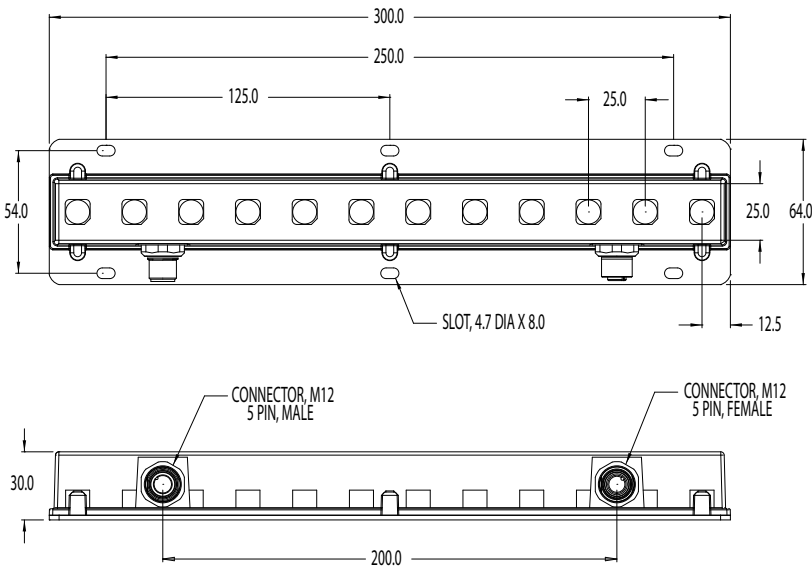

Length (mm)	300
Width (mm)	64
Height (mm)	30

Dimensions are in millimeters



Part Number Key

Model	—	Control	Model Indicator	Lens Type	—	Spectral Wavelength
AL	—	X	XXXXXX	X	—	XXX
AL		S (strobe)	025300	M (medium spread) W (wide spread)		470 (blue) 625 (red) WHI (white)
Ex: AL-S025300M-470 AL-S025300W-WHI						

Stock Product: *shipped next day*
None

Build to Order: *shipped in two weeks*

Optical Performance

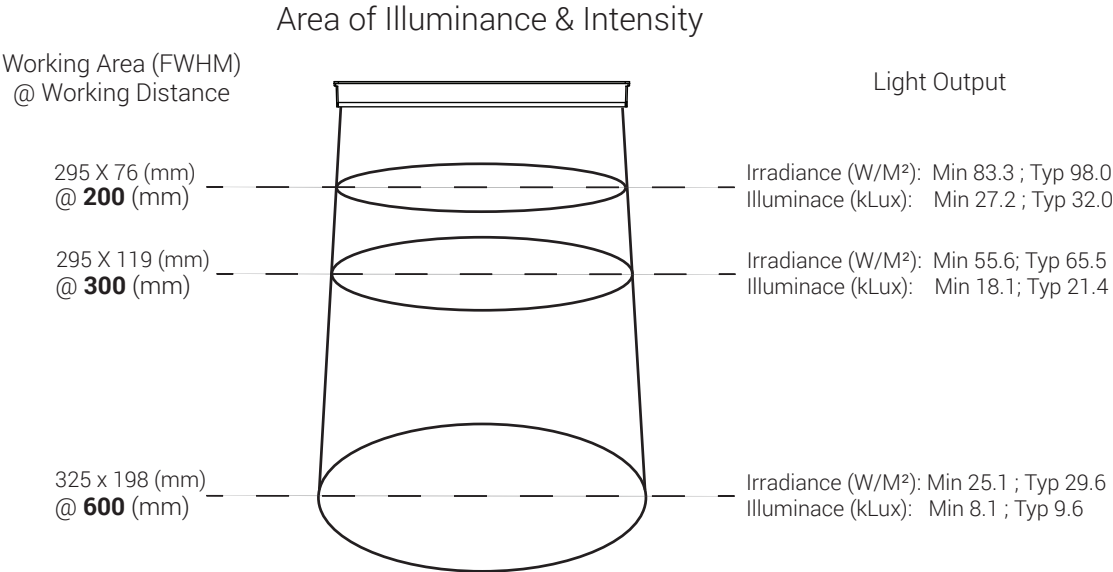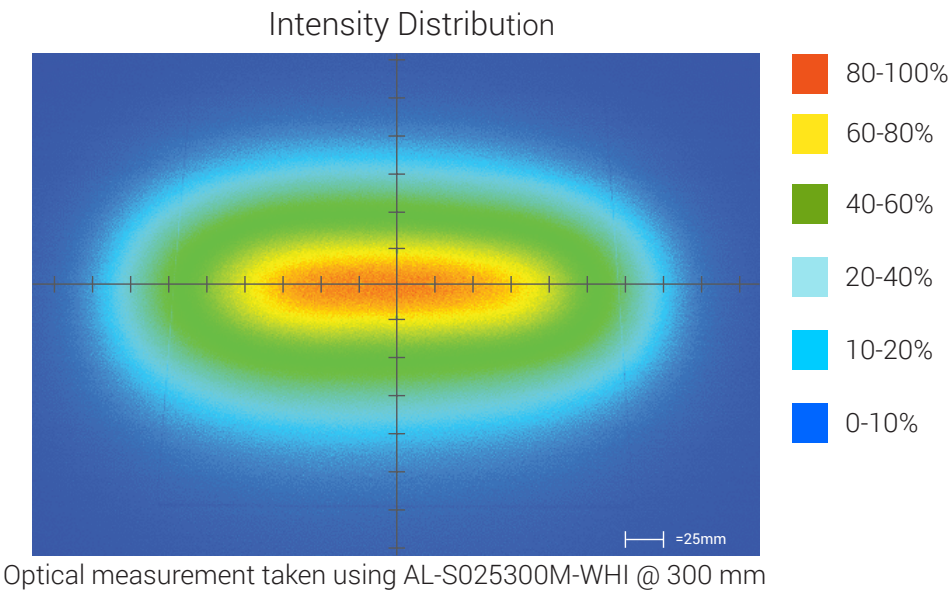

Operation & Wiring


Modes of Operation

Continuous	Strobe	Thermal Foldback
<p>To enable output: Tie Trigger+ (black) HIGH to >0.5V.</p> <p>The light remains ON as long as Trigger+ is HIGH.</p> <p>Analog dimming is available: pin 5, gray</p>	<p>EuroBrite™ S-version uses Adaptive Overdrive™ to produce overdrive pulses while the trigger is HIGH.</p> <p>Overdrive period occurs from 0-5msec; light output can be increased by as much as 5X.</p> <p>Overdriving does not occur when pulses exceed 5msec.</p> <p>Analog dimming is available: pin 5, gray</p>	<p>To engage Thermal Foldback:</p> <p>Before turning the light on, tie pin 2 (white) to pin 3 (GND, blue).</p> <p>Onboard thermistor is sampled for 5 minutes. Light intensity will automatically adjust based on the Tcase during the training period.</p> <p>The beginning of training is signified by a series of rapid flashes. While training, the light will blink every two seconds. A few slower blinks signal the end of the training period.</p>


Standard Wiring Information

Pin	Function	Wire Color	Type
1	24VDC	Brown	Power
2	Thermal Foldback	White	Input
3	GND	Blue	Power
4	Trigger +	Black	Input
5	Analog	Gray	Input

Male 5-Position




Wiring Diagrams

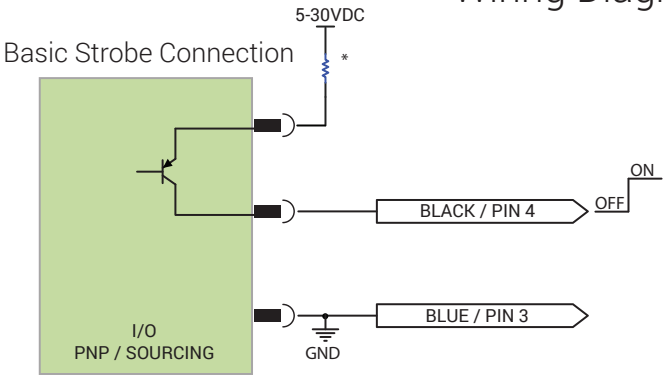

*External resistors may not be needed
Check documentation on I/O for recommendations and voltage limits

Analog Dimming

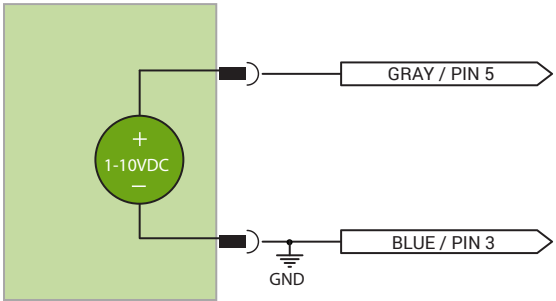

Analog dimming works in both strobe and continuous

Warranty Information

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory. Products are warranted to be free of defects in workmanship and materials for a period of two years from the original date of purchase. Should a defect develop during this period, please contact Ai Customer Service or your Ai distributor for a Return Merchandise Authorization (RMA), and return the complete product, freight prepaid, to Ai. If a defect is found, Ai will - at our discretion - repair or replace the product without charge. Ai claims no liability for any implied warranties, including "merchantability" and "fitness for a specific purpose."

Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable protection against harmful interference only when the product is operated in its intended industrial electromagnetic environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

Customer Service

For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to 5:00 pm, EST or send an email to orders@advill.com.

Company Information

Advanced Illumination

440 State Garage Road, Rochester VT. 05767

Phone: 802.767.3830

Fax: 802.767.3831

Email: info@advancedillumination.com

Web: advancedillumination.com

© 2015 Advanced Illumination Inc. All rights reserved