

Alvium

1800 U-1240m

- IMX226 CMOS sensor
- ALVIUM image processing
- USB3 Vision
- Various hardware options

Hardware option: Open Housing C-Mount 90°

Alvium 1800 U – Your entry into high-performance imaging

Industrial USB cameras with attractive price-performance ratio

Alvium 1800 U-1240 with Sony IMX226 runs 29.0 frames per second at 12.2 MP resolution.

Alvium 1800 U is your entry into high-performance imaging with ALVIUM® Technology for industrial applications. Equipped with the newest generation of sensors, these small and lightweight cameras deliver high image quality and frame rates at the best price-performance ratio. With its USB3 Vision compliant interface and industrial-grade hardware, it is your workhorse for different machine vision applications whether it is on a PC-based or an embedded system.

Easy software integration with [Allied Vision's Vimba Suite](#) and compatibility to the most popular third party image-processing libraries.

See the [Alvium Cameras Hardware Options](#) for lens mount and housing options, as well as the [Customization and OEM Solutions webpage](#) for additional options.

Specifications

Alvium 1800 U-1240m Open Housing C-Mount 90°

| | |
|--------------|---------------------|
| Product code | 14822 |
| Interface | USB3 Vision |
| Resolution | 4024 (H) × 3036 (V) |

Alvium 1800 U-1240m Open Housing C-Mount 90°


| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| Spectral range | 300 to 1100 nm |
| Sensor | Sony IMX226 |
| Sensor type | CMOS |
| Shutter mode | Global reset and Rolling shutter |
| Sensor size | Type 1/1.7 |
| Pixel size | 1.85 μm \times 1.85 μm |
| Lens mount | C-Mount |
| Max. frame rate at full resolution | 29 fps at 375 MByte/s, Mono8 |
| ADC | 10 Bit |
| Image buffer (RAM) | 256 KB |
| Non-volatile memory (Flash) | 1024 KB |
| Imaging performance | |
| Imaging performance data is based on the evaluation methods in the EMVA 1288 Release 3.1 standard for characterization of image sensors and cameras. Measurements are typical values for monochrome models measured without optical filter. | |
| Quantum efficiency at 529 nm | 74 % |
| Temporal dark noise | 4.8 e ⁻ |
| Saturation capacity | 10500 e ⁻ |
| Dynamic range | 65 dB |
| Absolute sensitivity threshold | 6.3 e ⁻ |
| Output | |
| Bit depth | Max. 10 Bit |
| Monochrome pixel formats | Mono8, Mono10, Mono10p |
| General purpose inputs/outputs (GPIOs) | |
| TTL I/Os | 4 programmable GPIOs |
| Operating conditions/dimensions | |
| Operating temperature | -20 °C to +65 °C (housing) |
| Power requirements (DC) | Power over USB 3.1 Gen 1 External power 5.0 V |
| Power consumption | USB power: 3.1 W (typical) Ext. power: 3.3 W (typical) |
| Mass | 50 g |
| Body dimensions (L \times W \times H in mm) | 30 \times 32 \times 29 |

Alvium 1800 U-1240m Open Housing C-Mount 90°

Regulations

2011/65/EU, including amendment 2015/863/EU (RoHS)

Quantum efficiency

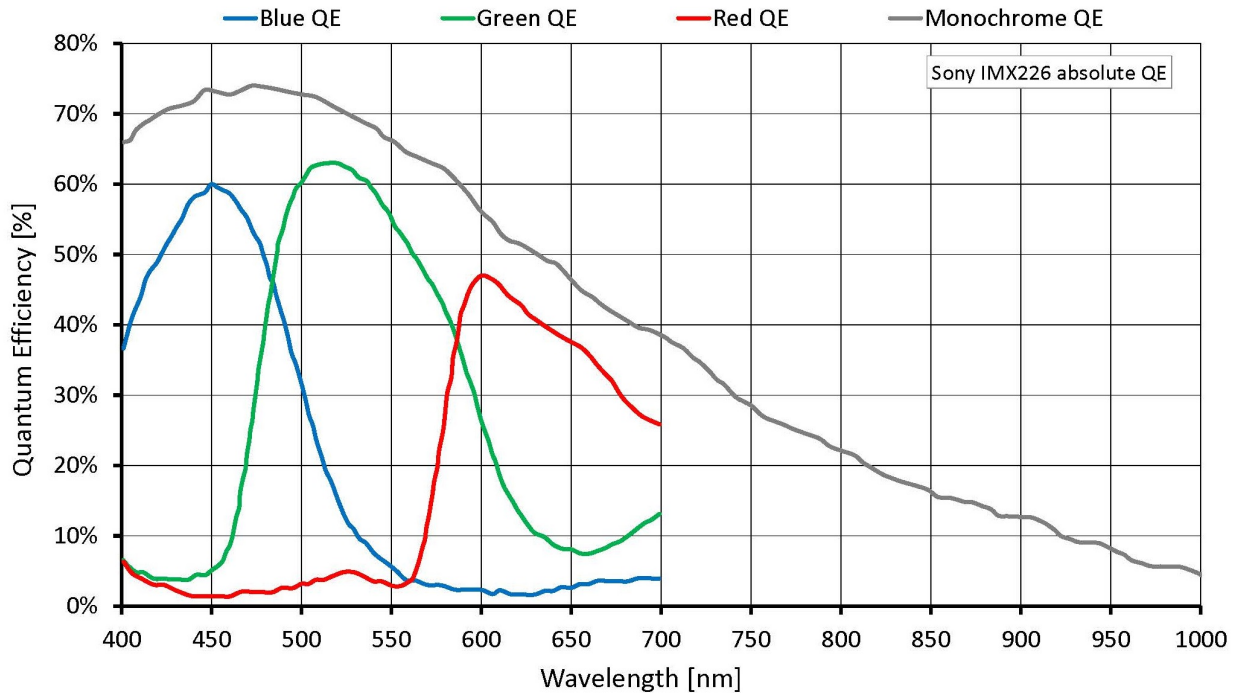

Features

Image control: Auto

- Auto exposure
- Auto gain
- Auto white balance (color models)

Image control: Other

- Binning
- Black level

- Color transformation (incl. hue, saturation; color models)
- De-Bayering up to 5×5 (color models)
- DPC (defect pixel correction)
- FPNC (fixed pattern noise correction)
- Gamma
- LUT (look-up table)
- Reverse X/Y
- ROI (region of interest)
- Sharpness/Blur

Camera control

- Acquisition frame rate
- Bandwidth control
- Firmware update in the field
- I/O and trigger control
- Temperature monitoring
- U3 Power Saving Mode

Technical drawing

