

Alvium 1800 U-050C

- PYTHON 480 CMOS sensor
- ALVIUM image processing
- USB3 Vision
- Various hardware options

Hardware option: Closed Housing C-Mount Standard

Alvium 1800 U – Your entry into high-performance imaging

Industrial USB cameras with attractive price-performance ratio

Alvium 1800 U-050 with ON Semi PYTHON 480 runs 117.0 frames per second at 0.5 MP resolution.

Alvium 1800 U is your entry into high-performance imaging with ALVIUM® Technology for industrial applications. Equipped with the newest generation of sensors, these small and lightweight cameras deliver high image quality and frame rates at the best price-performance ratio. With its USB3 Vision compliant interface and industrial-grade hardware, it is your workhorse for different machine vision applications whether it is on a PC-based or an embedded system.

Easy software integration with [Allied Vision's Vimba Suite](#) and compatibility to the most popular third party image-processing libraries.

See the [Alvium Cameras Hardware Options](#) for lens mount and housing options, as well as the [Customization and OEM Solutions webpage](#) for additional options.

Specifications

Alvium 1800 U-050c Closed Housing C-Mount Standard

Product code	13617
Interface	USB3 Vision
Resolution	808 (H) × 608 (V)

Alvium 1800 U-050c Closed Housing C-Mount Standard

Spectral range	300 to 1100 nm
Sensor	ON Semi PYTHON 480
Sensor type	CMOS
Shutter mode	Global shutter
Sensor size	Type 1/3.6
Pixel size	4.8 μm \times 4.8 μm
Lens mount	C-Mount
Optical Filter	Type Hoya C5000 IR cut filter
Max. frame rate at full resolution	117 fps at \geq 200 MByte/s, Mono8
ADC	10 Bit
Image buffer (RAM)	256 KB
Non-volatile memory (Flash)	1024 KB

Imaging performance

Imaging performance data is based on the evaluation methods in the EMVA 1288 Release 3.1 standard for characterization of image sensors and cameras. Measurements are typical values for monochrome models measured without optical filter.

Quantum efficiency at 529 nm	53 %
Temporal dark noise	14.5 e^-
Saturation capacity	7230 e^-
Dynamic range	54 dB
Absolute sensitivity threshold	14.9 e^-

Output

Bit depth	Max. 10 Bit
Monochrome pixel formats	Mono8, Mono10, Mono10p
YUV color pixel formats	YCbCr411_8_CbYYCrYY, YCbCr422_8_CbYCrY, YCbCr8_CbYCr
RGB color pixel formats	BayerRG8, BayerRG10, BayerRG10p, BGR8, RGB8 (default)

General purpose inputs/outputs (GPIOs)

TTL I/Os	4 programmable GPIOs
----------	----------------------

Operating conditions/dimensions

Operating temperature	-20 $^{\circ}\text{C}$ to +65 $^{\circ}\text{C}$ (housing)
Power requirements (DC)	Power over USB 3.1 Gen 1 External power 5.0 V

Alvium 1800 U-050c Closed Housing C-Mount Standard


Power consumption USB power: 1.5 W (typical) | Ext. power: 1.7 W (typical)

Mass 60 g

Body dimensions (L × W × H in mm) 38 × 29 × 29

Regulations 2014/30/EU; 2011/65/EU, incl. amendment 2015/863/EU (RoHS); FCC Class B digital device; CAN ICES-003 (B) / NMB-3 (B)

Quantum efficiency

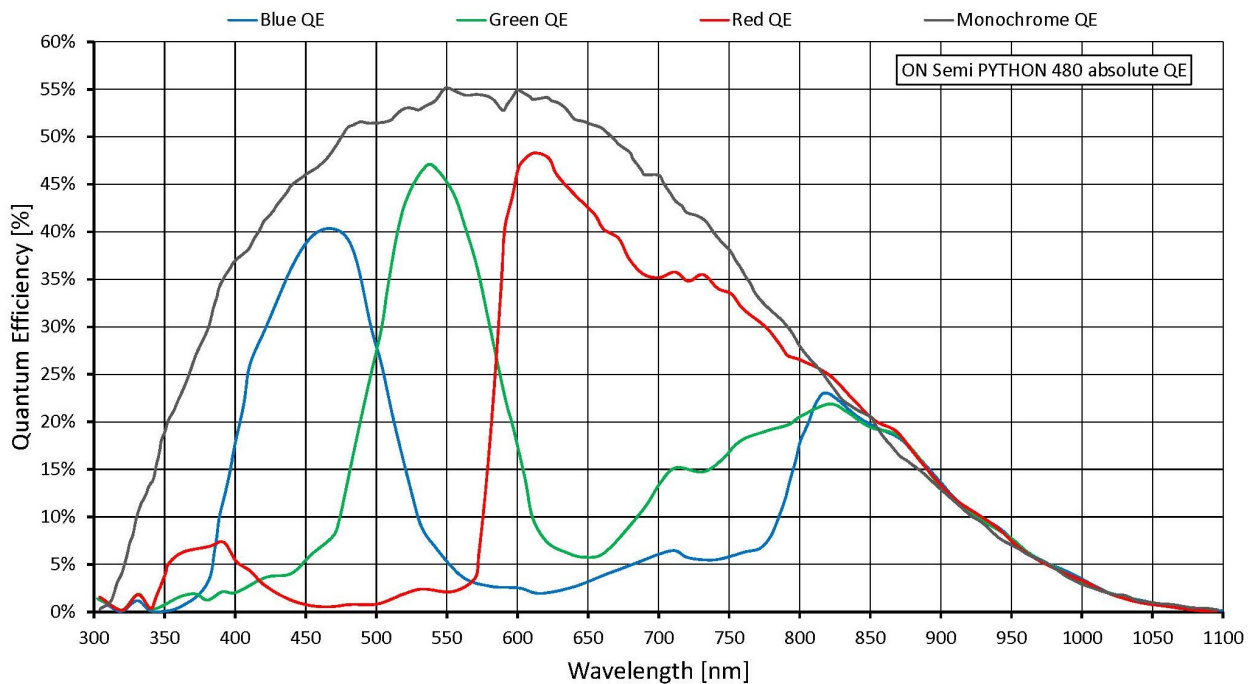

Features

Image control: Auto

- Auto exposure
- Auto gain
- Auto white balance (color models)

Image control: Other

- Binning
- Black level
- Color transformation (incl. hue, saturation; color models)
- De-Bayering up to 5×5 (color models)
- DPC (defect pixel correction)
- FPNC (fixed pattern noise correction)
- Gamma
- LUT (look-up table)
- Reverse X/Y
- ROI (region of interest)
- Sharpness/Blur

Camera control

- Acquisition frame rate
- Bandwidth control
- Firmware update in the field
- I/O and trigger control
- Temperature monitoring
- U3 Power Saving Mode

Technical drawing

